

AC SURGE PROTECTOR


BREAKING CAPACITY:60KA





Approved TUV Certificate at **EN50539-11** standard.



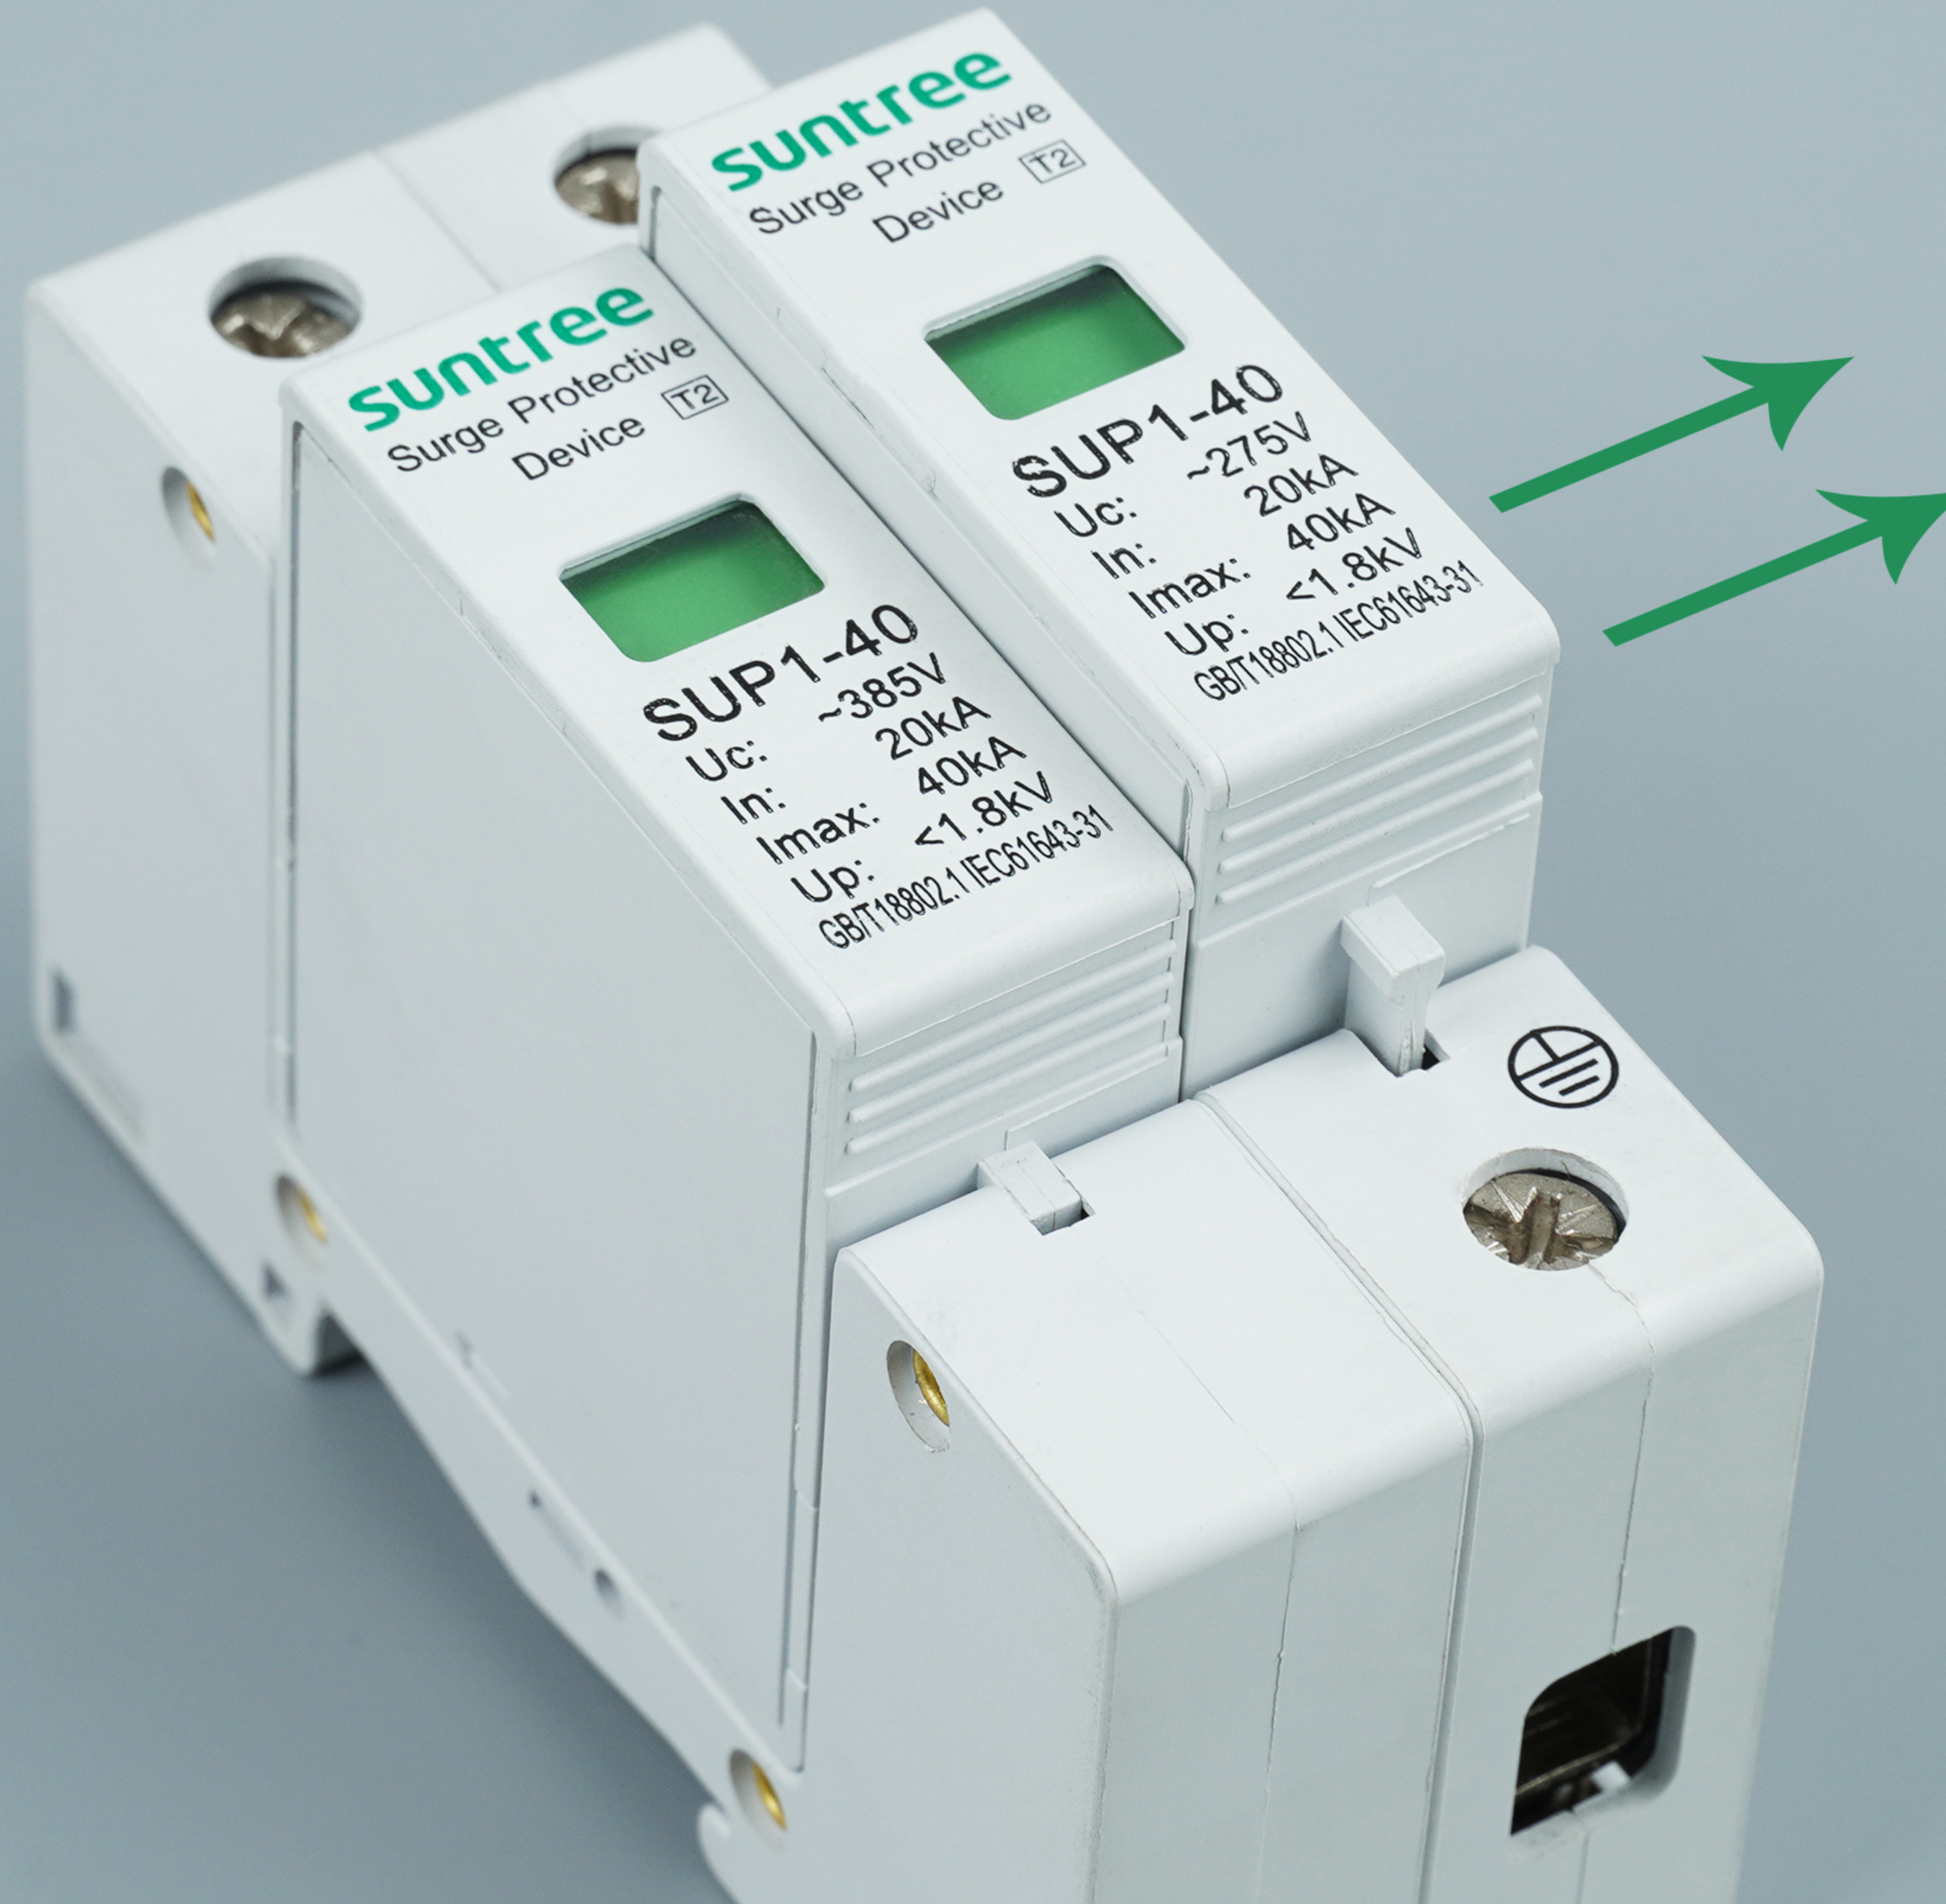



Two-body design, the module can be replaced, no additional maintenance is required



960°C flame retardant test

The flame can be extinguished by itself within 30 seconds after high-temperature combustion, no molten liquid drip from the product, and the cotton wool 30 cm below the product will not be ignited. It belongs to the **Vo** fire protection class.

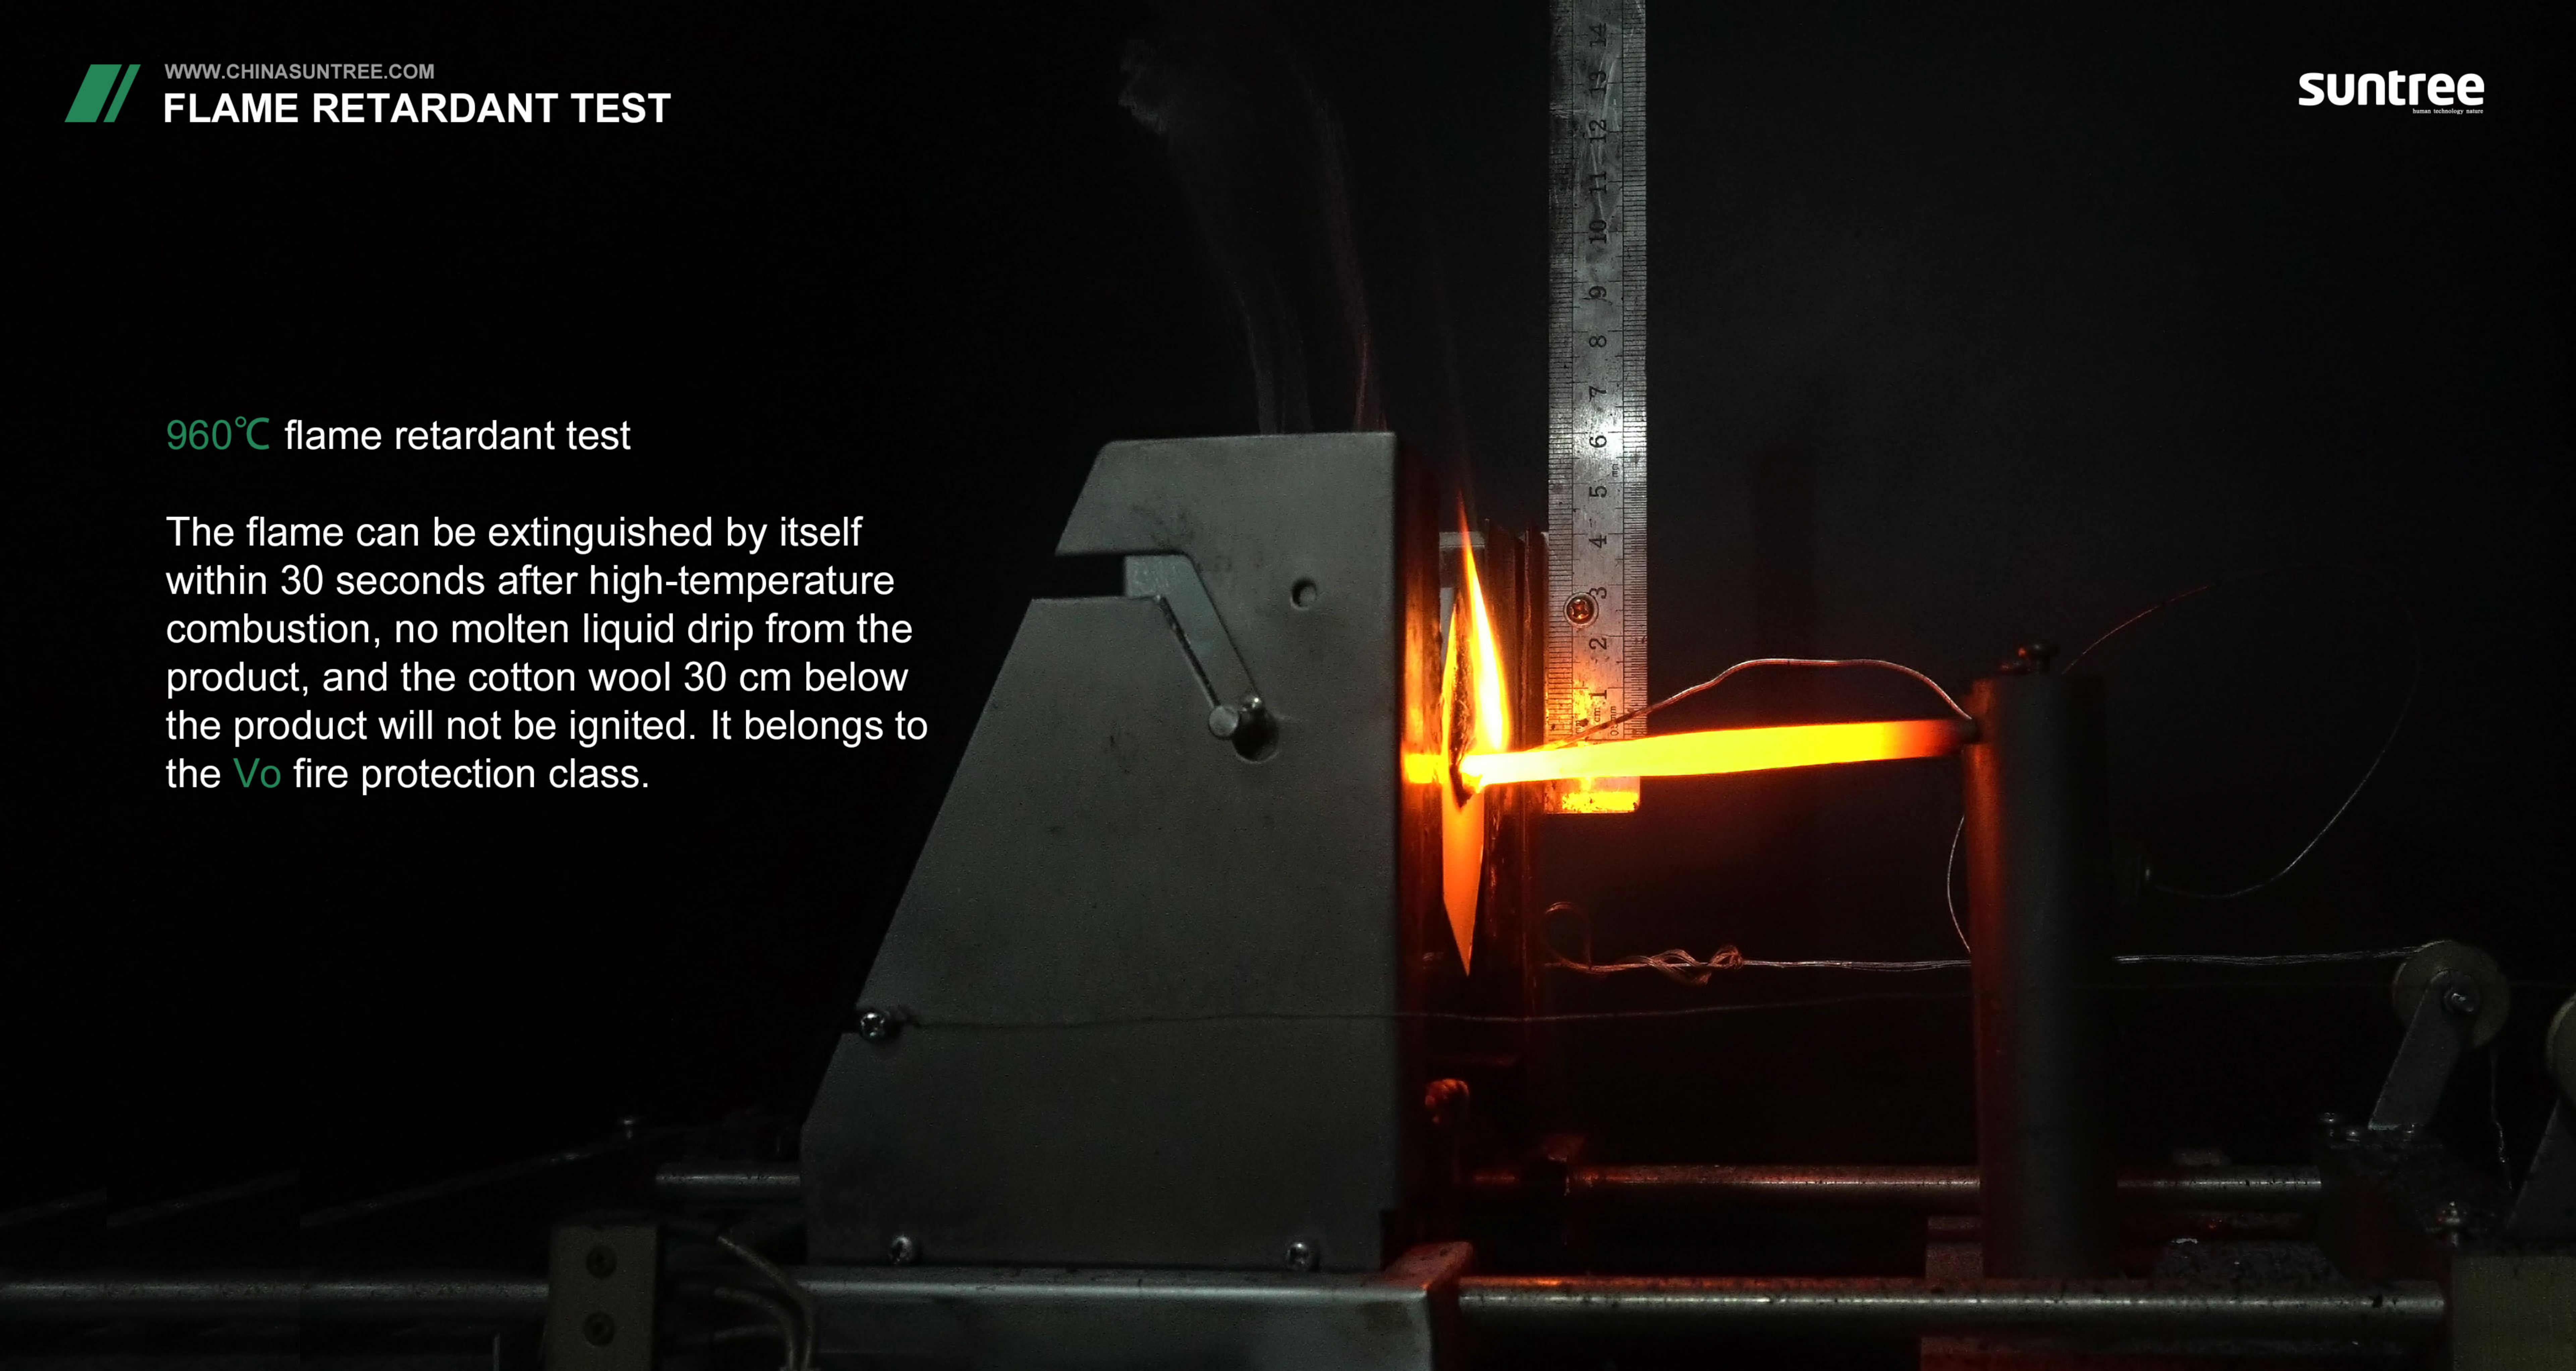

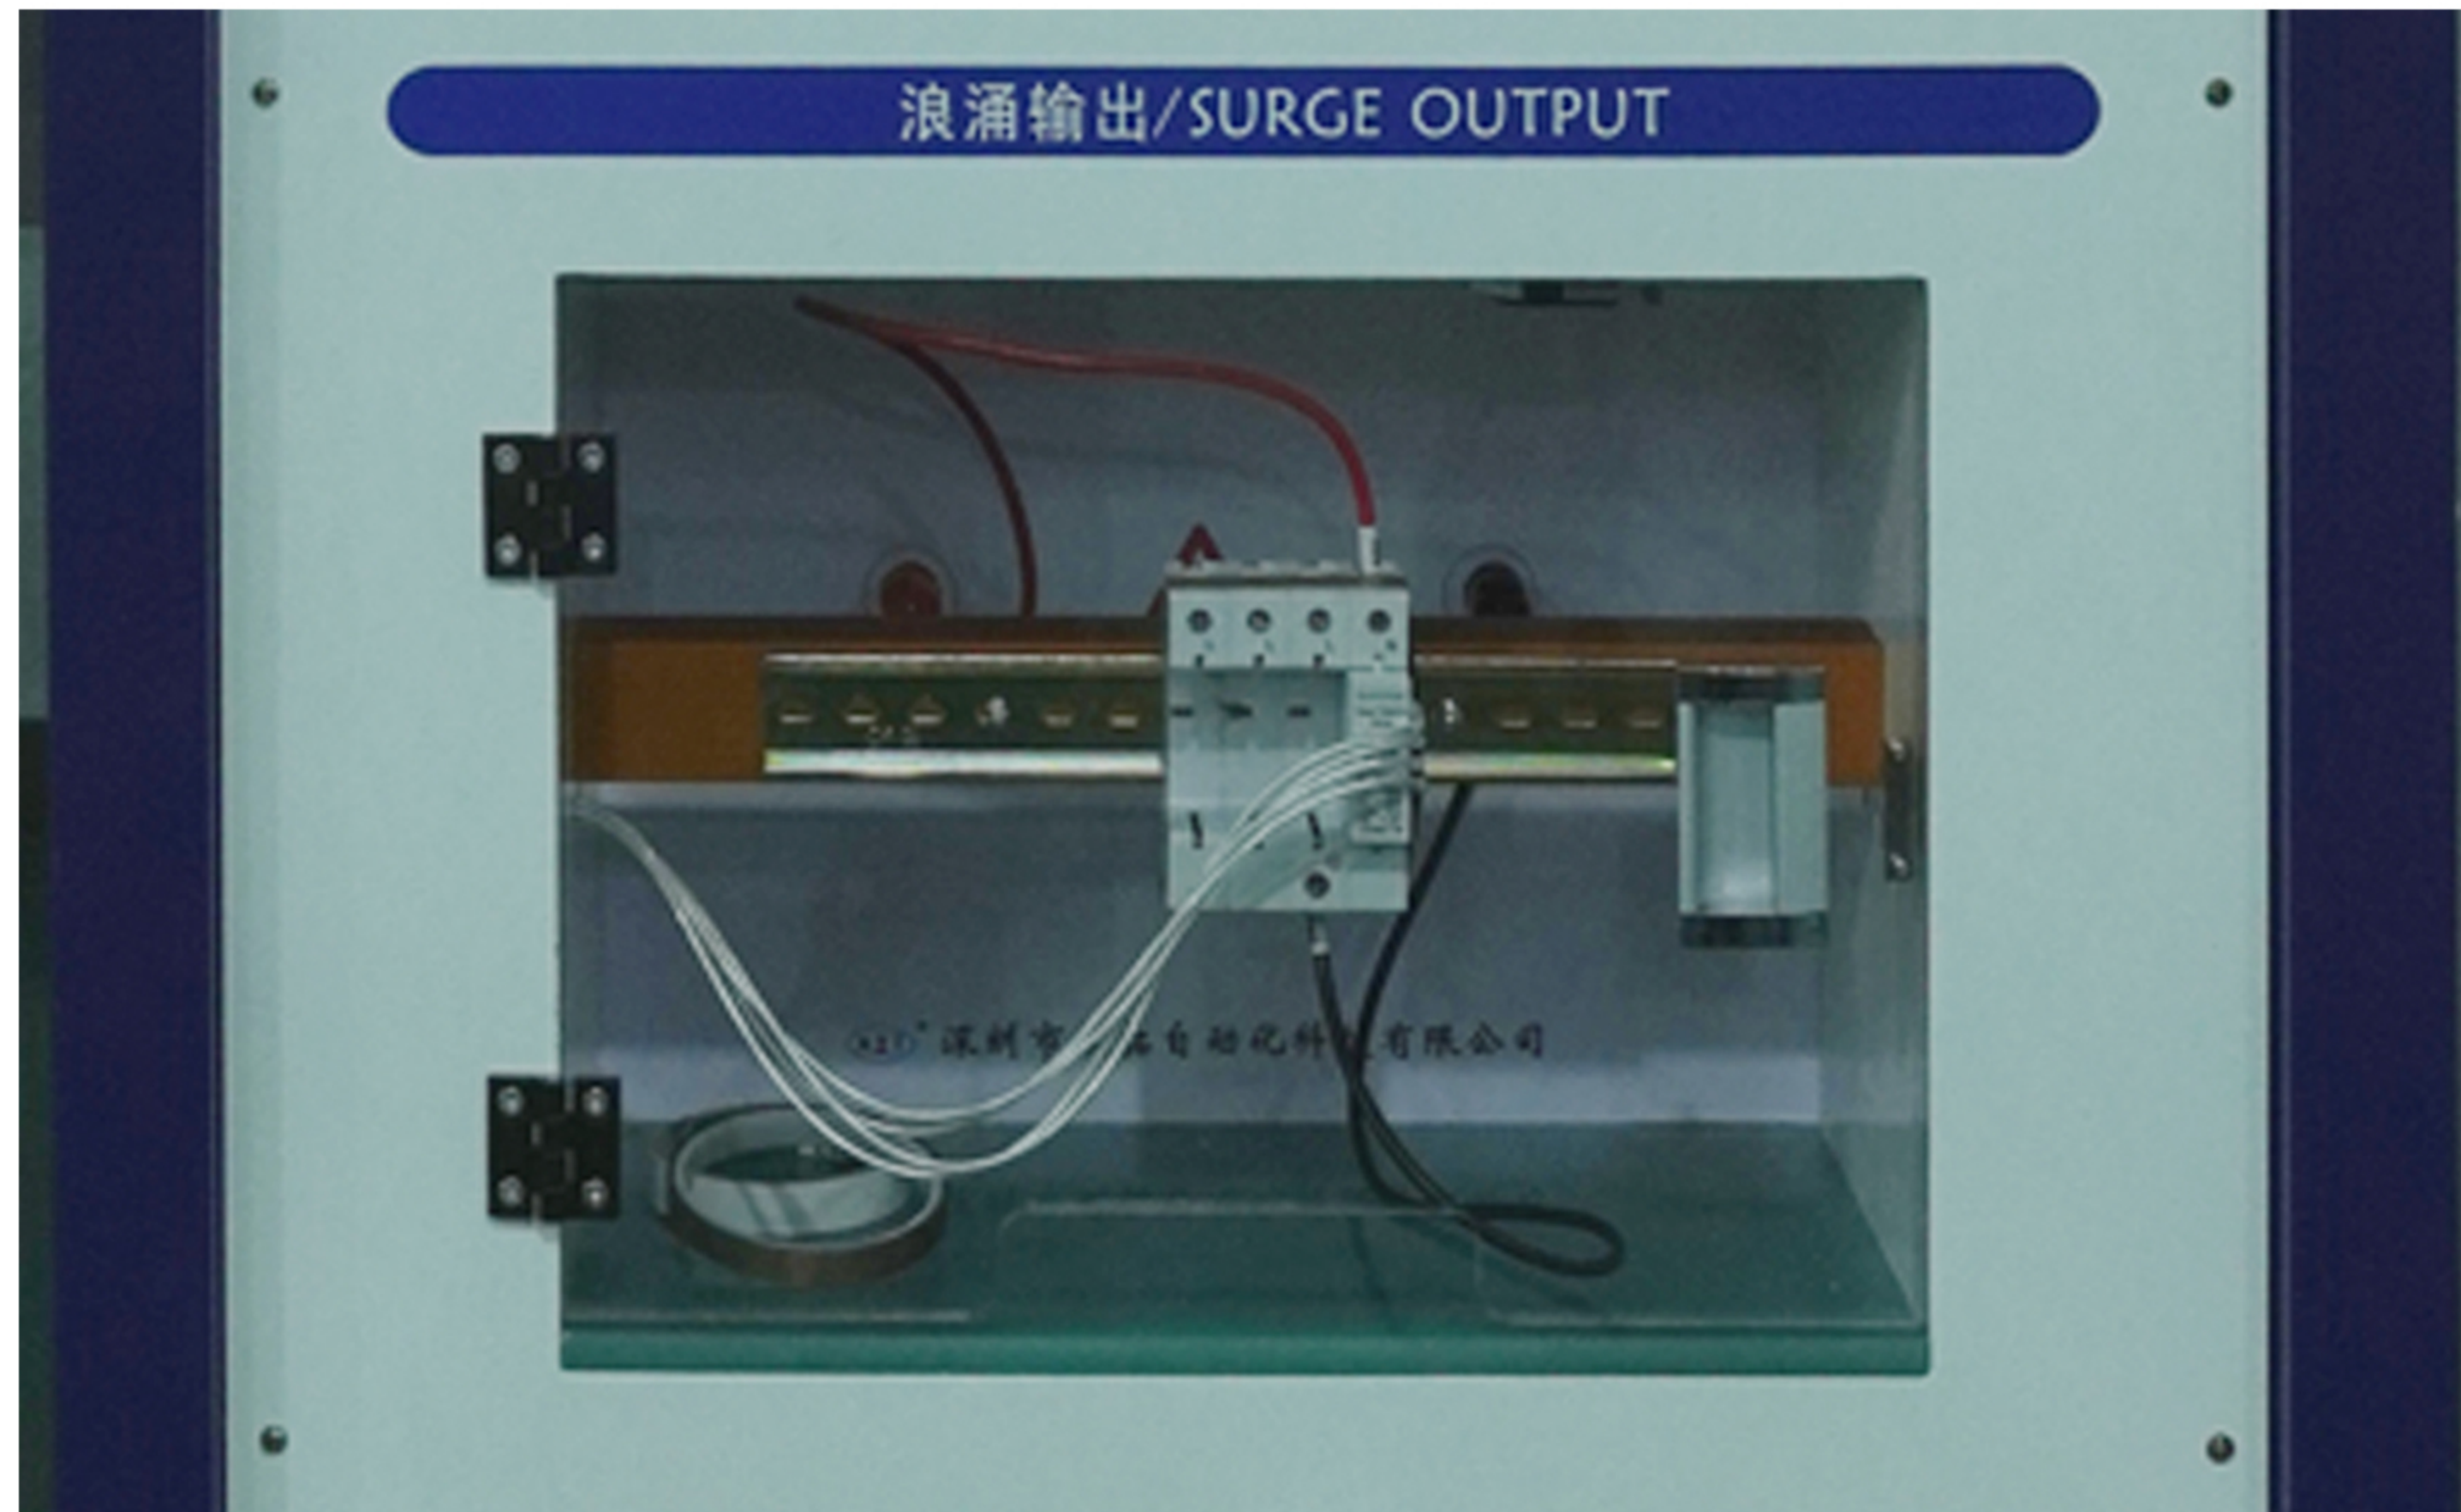

An external current of 40Ma (20, 80, 160, etc.) must be tripped when the case temperature reaches 120°. After 5 minutes, the temperature of the product after cooling does not exceed 80°. This test can prevent breakdown






Times 20 KA impacts the entire product test without tripping , up does not exceed 1.8KV




Shockproof

Anti-fall

Prevent product damage in transit.

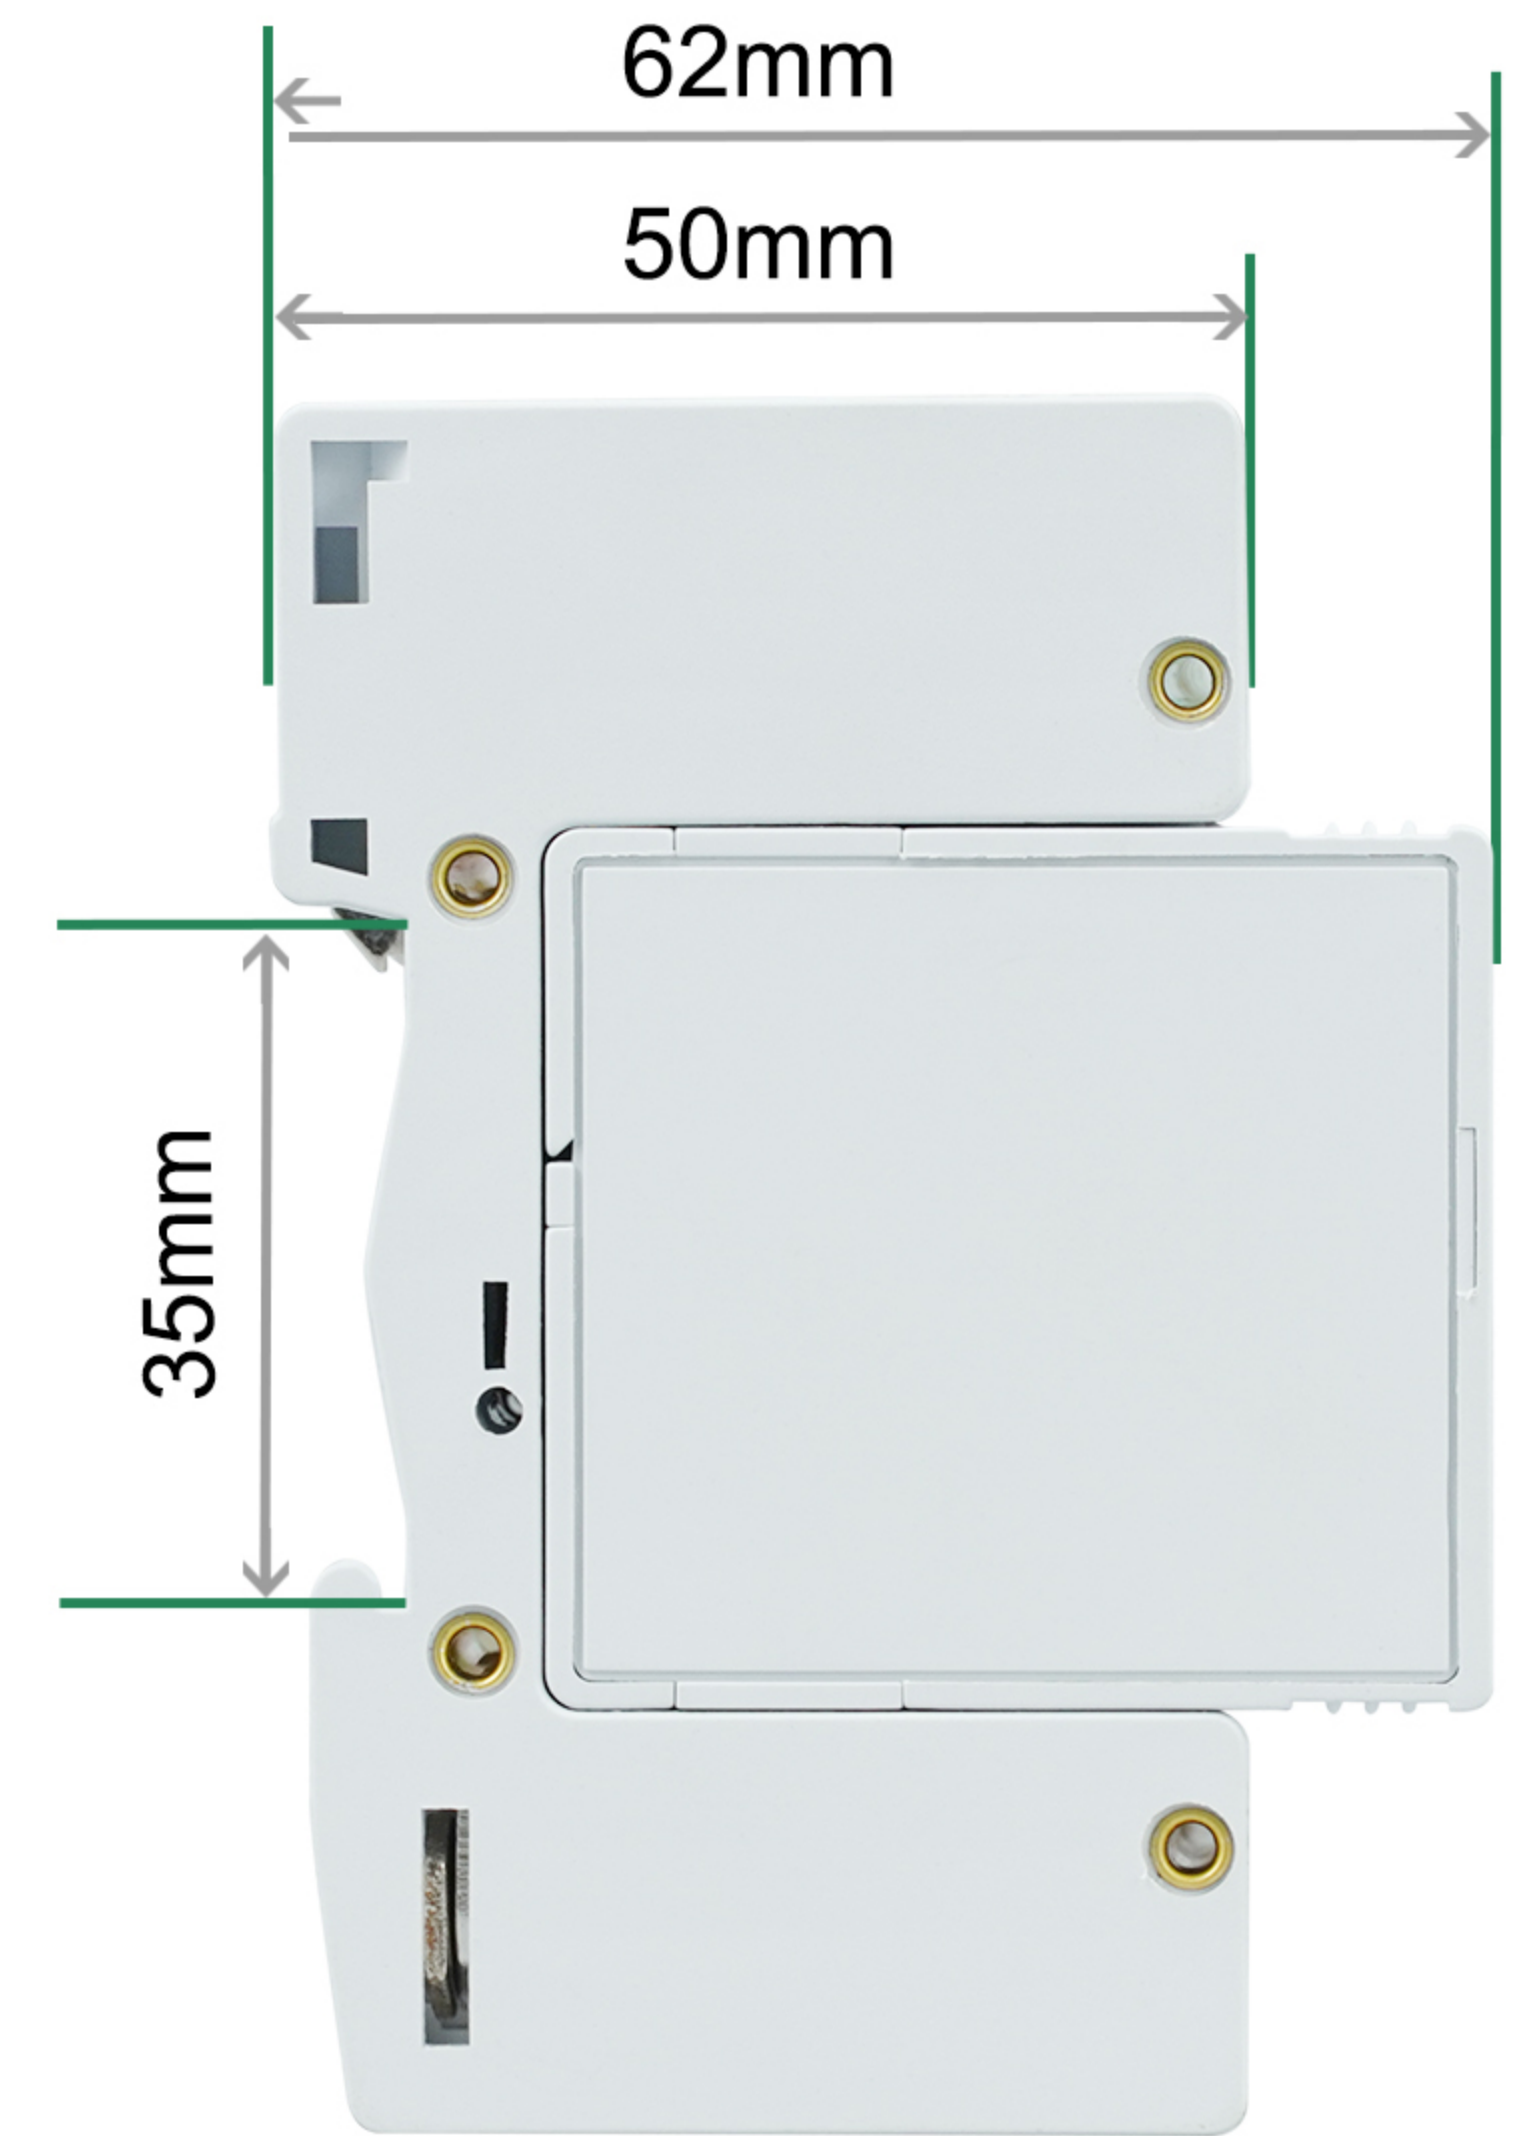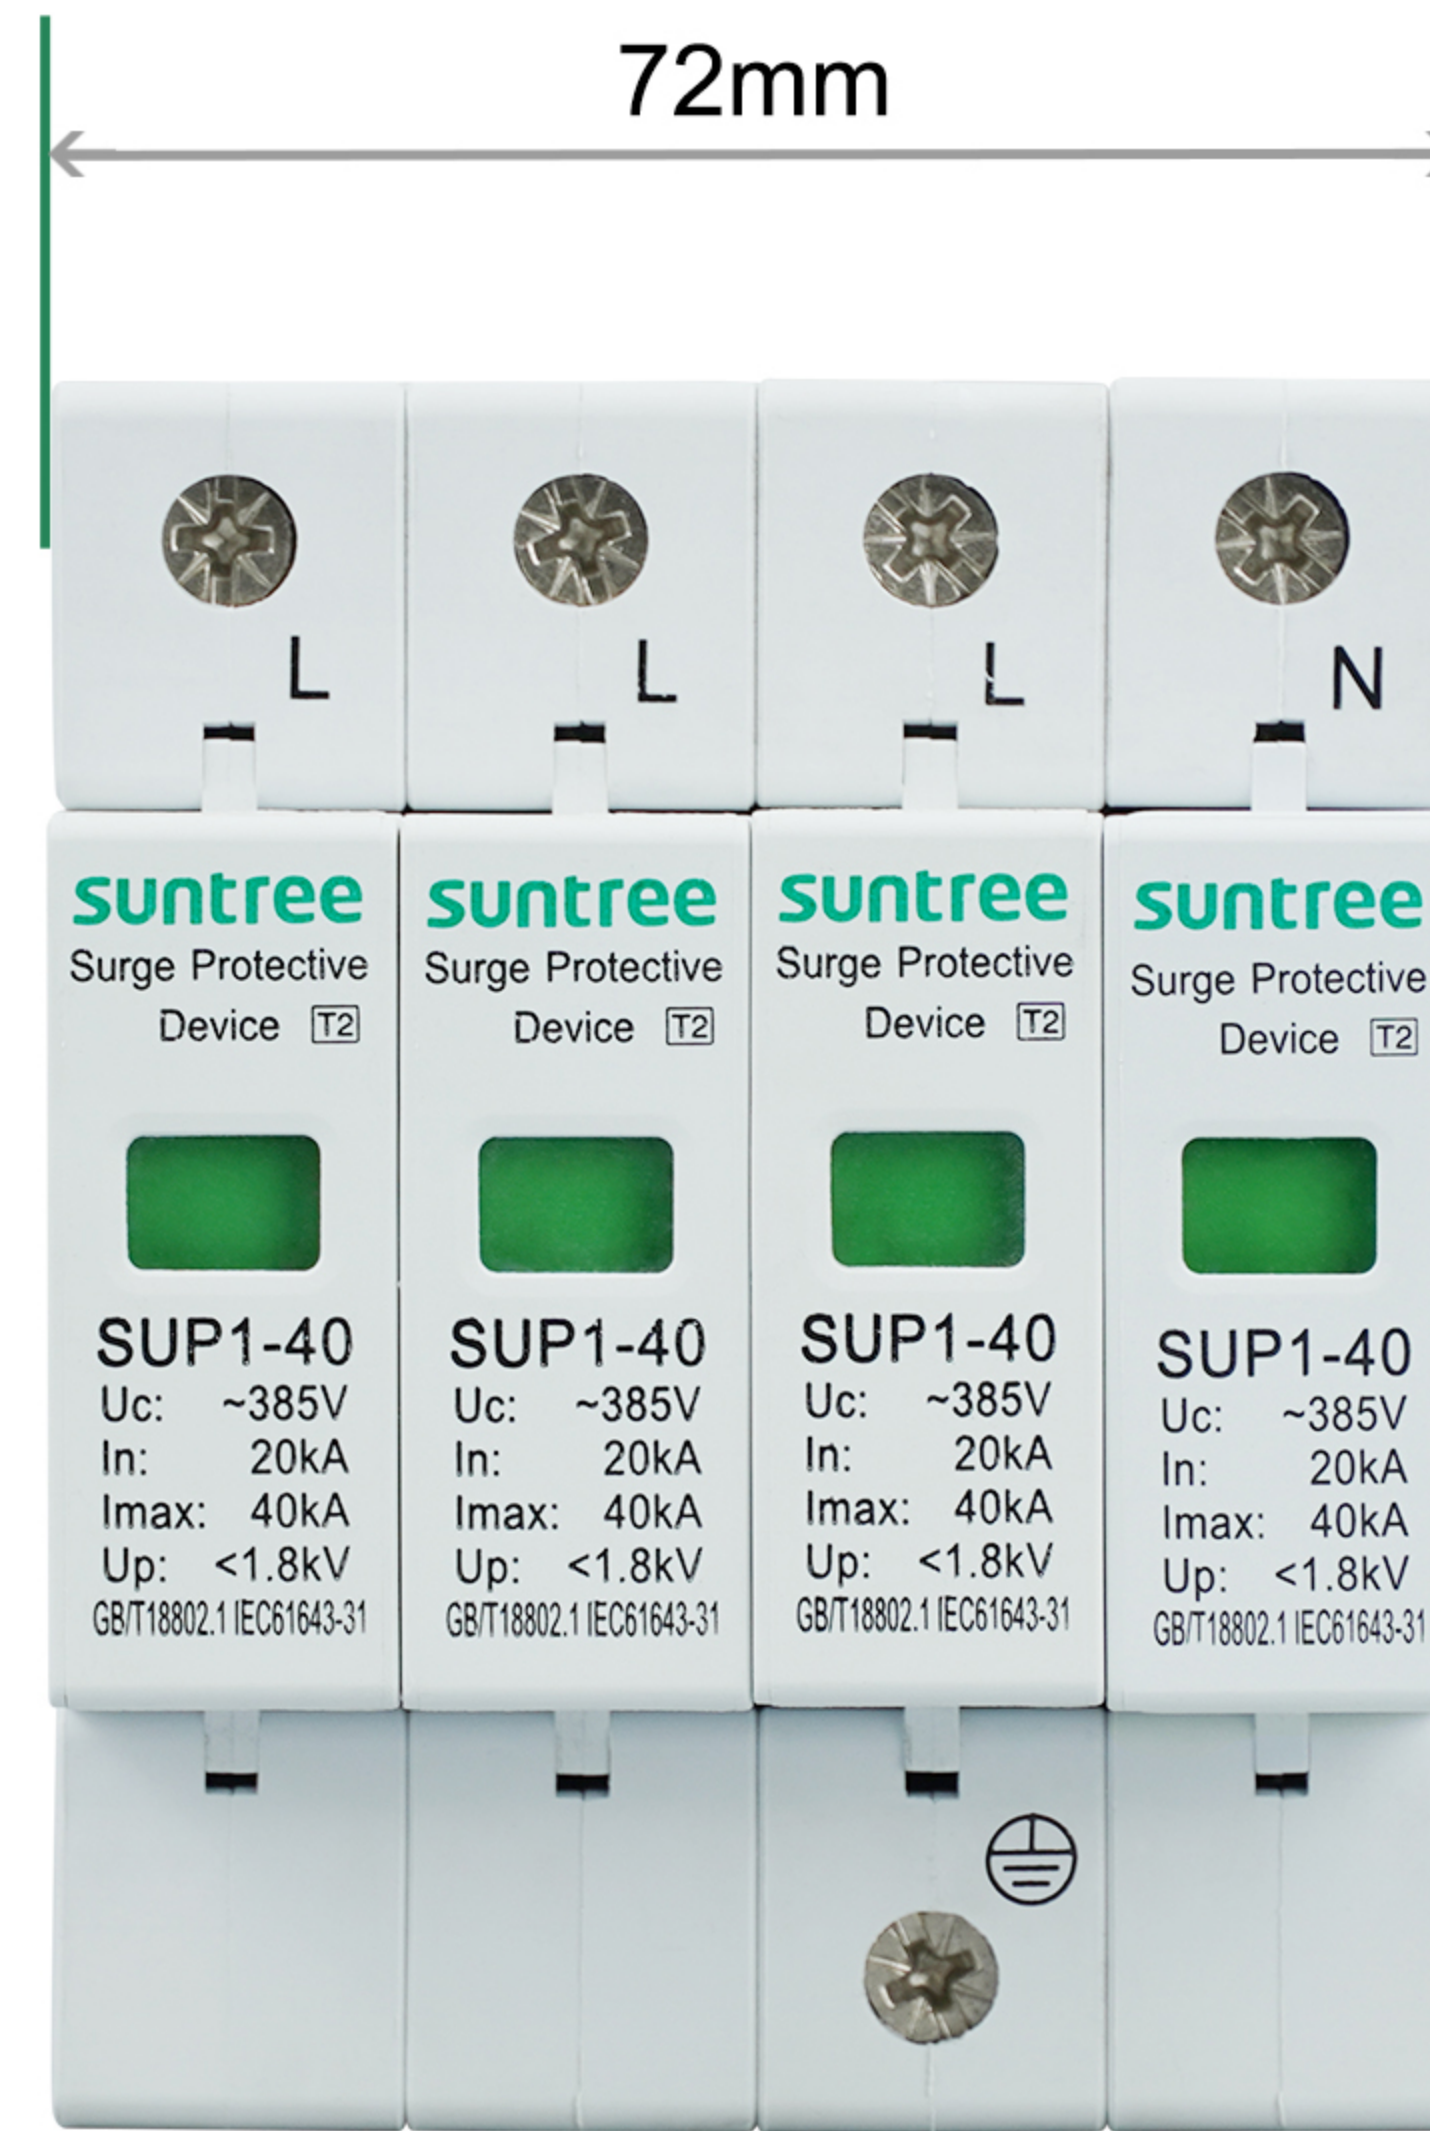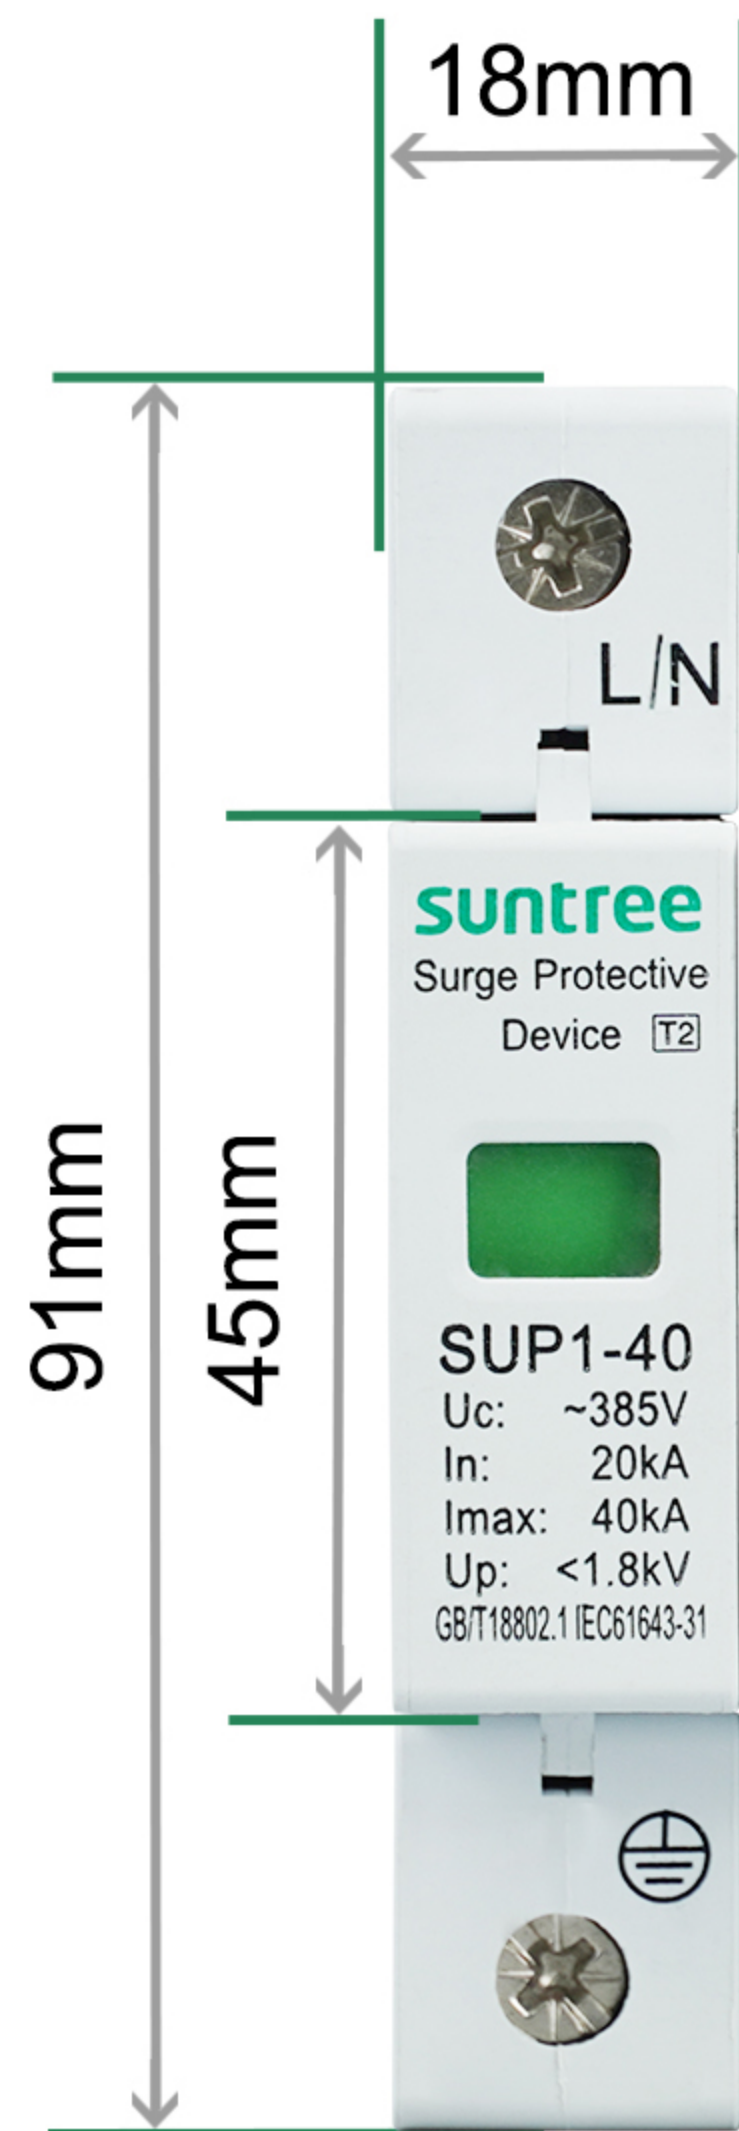

Fire wire Zero line

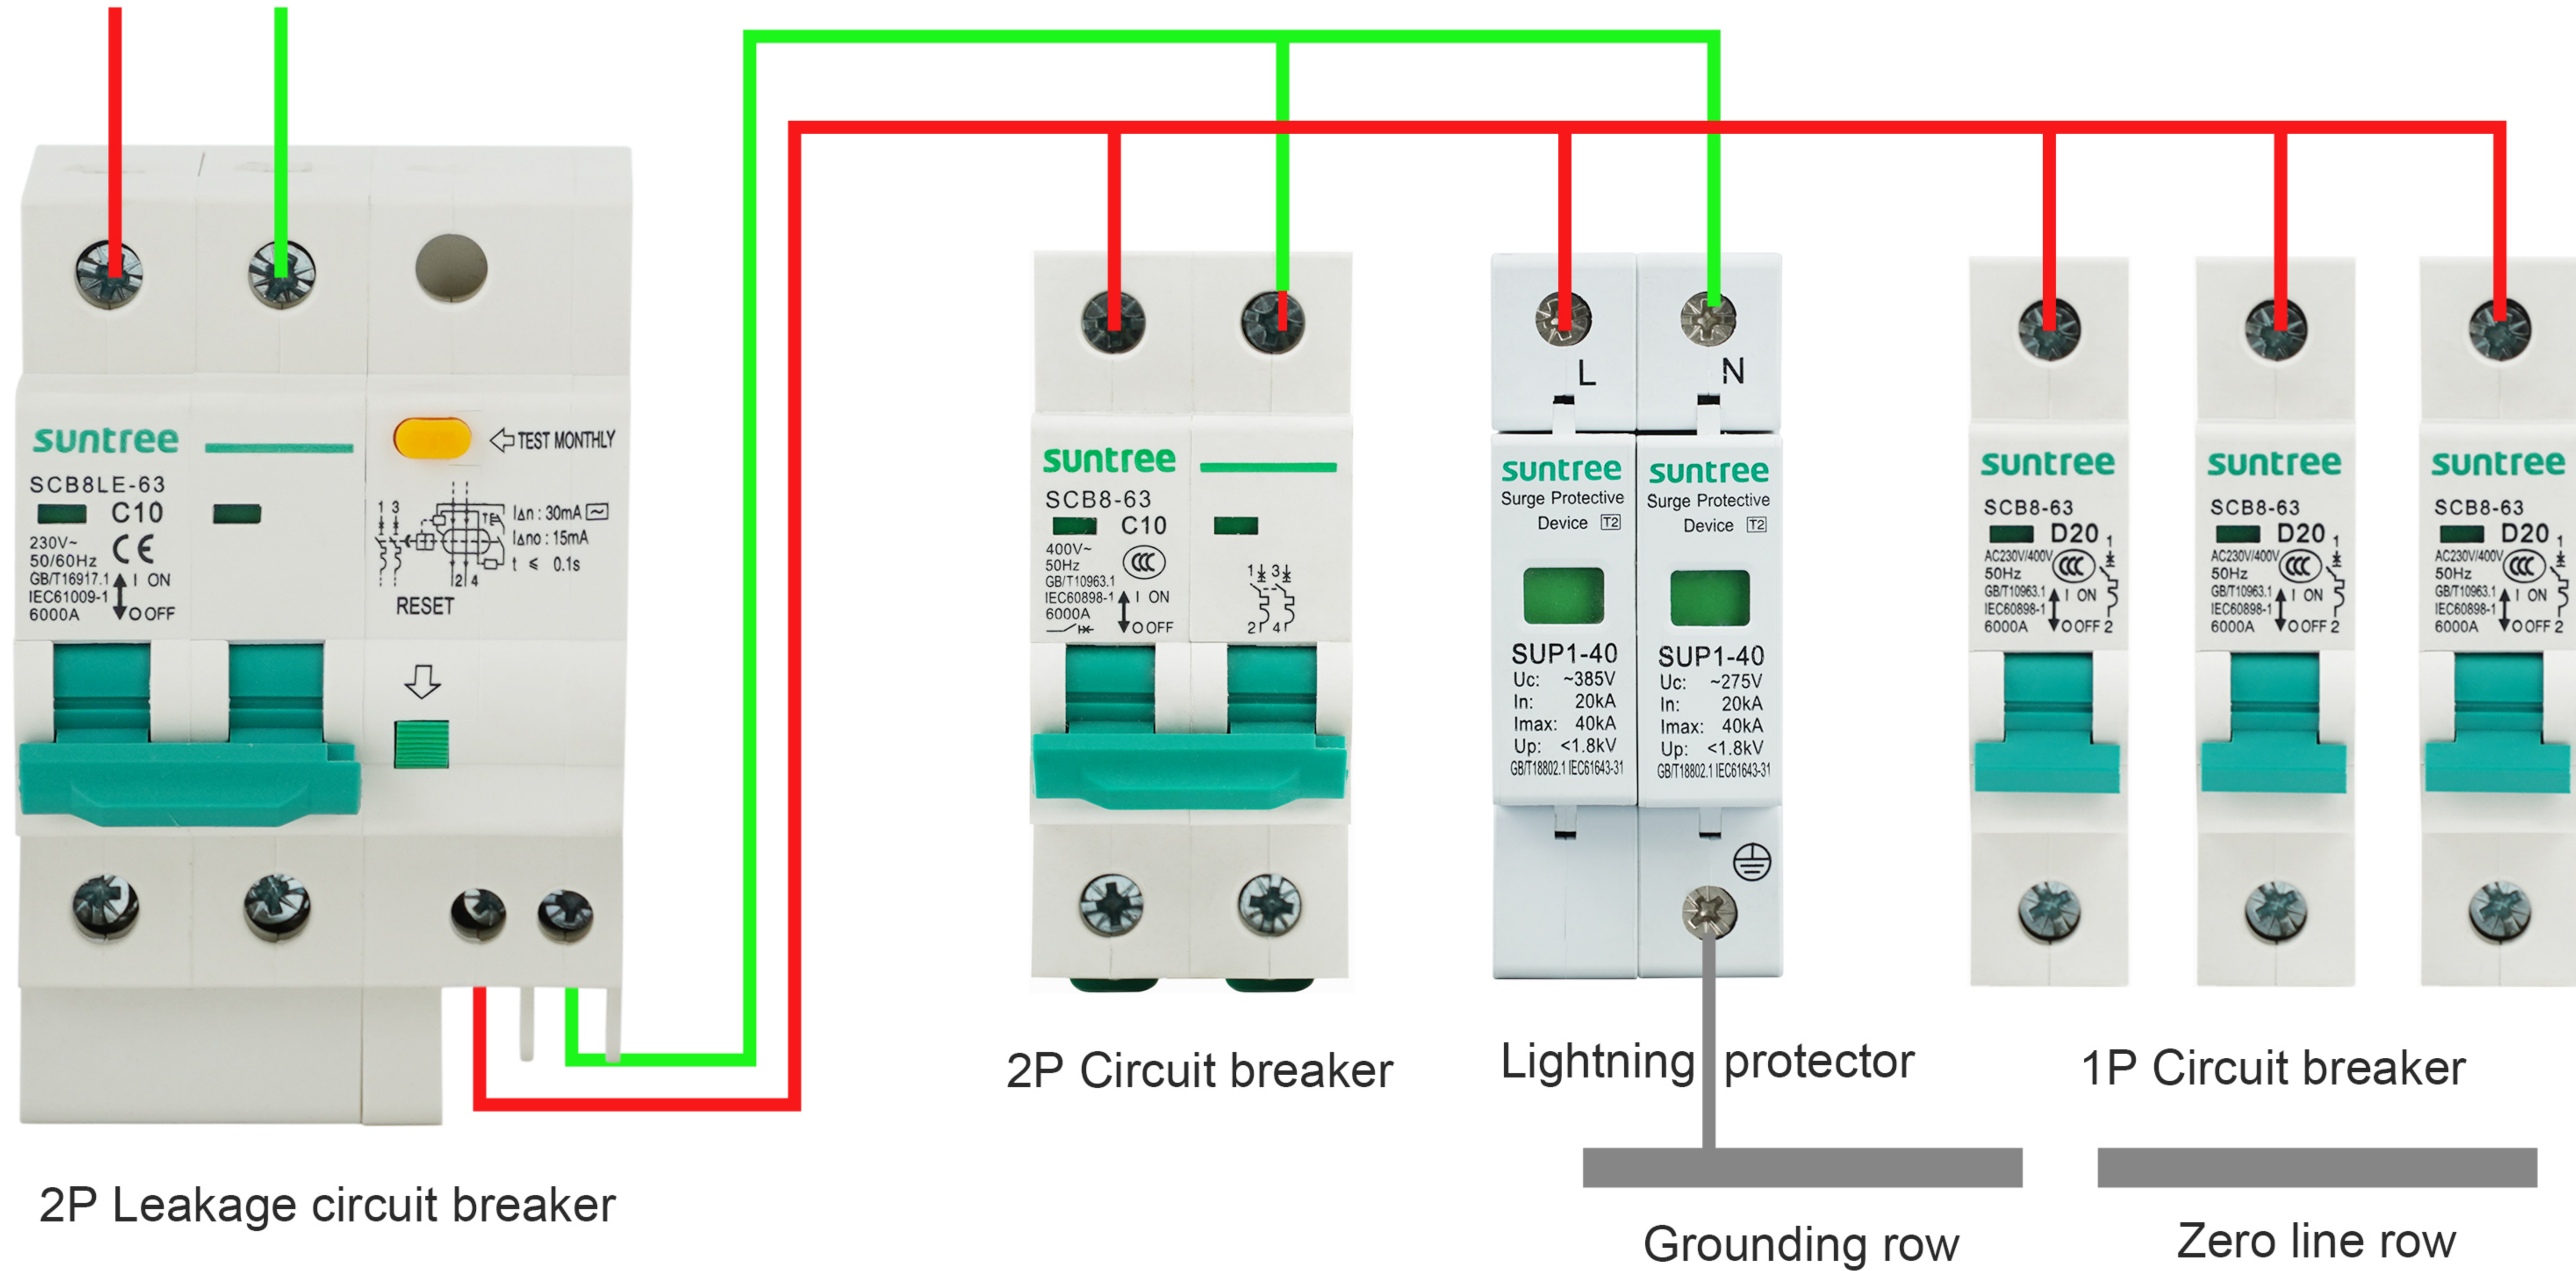





Inner box sticker

Surge protective device
 MODEL: SUP1-40
 SPECS: 4P-385V
 Number: 1PCS
 Date: 2021.10
925188



Outer box sticker

suntree
 order number: SUN2021917094-1
 Model: SUP1-40 In: 20kA
 Poles: 4P 385V
 Quantity: 30 Pcs MEAS: 42-32-16.5
 CW: 1.6KG NW: 1.65KG
 MADE IN CHINA



When the product is put into storage, the label on the box can conveniently count and identify the quantity, which is convenient to find and improving work efficiency.

suntree
human technology nature

www.chinasuntree.com

